Page 2 of 2 Form 0175A 3950 Programming Recovery 12/12/2007


Superchips Model 3950 **CHITLEX** Tuner Vehicle Recovery Programming Instructions Only for use with 2003-2005 Dodge Ram 5.9L Cummins

Inc,

PLEASE FOLLOW CORTEX ON SCREEN PROMPTS AS YOU PROCEED

In the event of an interruption during a programming sequence, the Cortex Tuner will attempt to recover the vehicle to the original stock program. It is necessary to carefully follow the screen prompts, possibly requiring multiple "Ignition OFF" and "Ignition ON" sequences, to correctly return the vehicle to stock settings.

Following the on screen prompts, turn the ignition off, and *disconnect the fusible link*. Look for the (Blue wire labeled *fuse link*?) and follow it until you see the connector located near the battery. (Be aware this blue wire has other colors of wire connected to it). See picture below for detailed location of connector. When prompted, re-connect fusible link, then when prompted turn ignition back on.

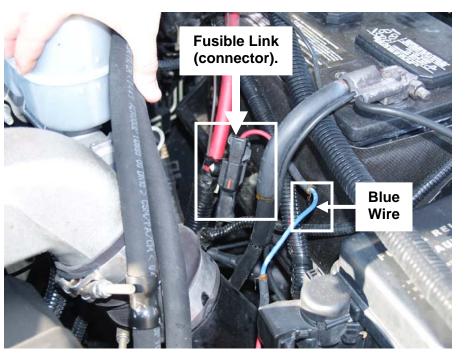

Status Notification

When recovery is completed your vehicle is returned to factory stock. You are now able to start your vehicle normally. You may now attempt to use the Cortex Tuner to program your vehicle again or to program another vehicle (the tuner is now reset and not locked to a vehicle). Follow the on-screen prompts. In the event that recovery is unsuccessful, or for any reason the Cortex Tuner fails to complete its programming cycle, a status message will be displayed on the unit. Please make note of the message displayed and contact Superchips Customer Service.

Superchips Model 3950 **CONTLEX** Tuner Vehicle Recovery Programming Instructions Only for use with 2003-2005 Dodge Ram 5.9L Cummins

Inc.

This document is for reference in the event a programming interruption occurs while the Cortex Tuner is connected to your vehicle.

<This section intentionally left blank>